



UNA-CLAD™ SERIES 200 Column Cover

DESCRIPTION:

The Series 200 hairline joint column covers are available in round, square, rectangular, and oblong configurations. Convert unfinished concrete columns, I-beams, or corner conditions to enhance the appearance of the building. New installer friendly alignment pin allows for final adjustment at the hairline joint without removal of column section.

METHOD OF APPLICATION:

1. Attachment of panels to a system of vertical channels or angles which are connected to an unfinished column element.
2. First attach column side with mounting pins to the framing then drop opposite column side in place (note the tear drop shape mounting holes). Series 200 column covers require 1" clearance at the head of the column to engage the tear drop mounting holes.

Note: Follow approved shop drawing installation details.


STORAGE:

1. Store in a well ventilated, dry place where no moisture can contact the panels. Moisture (from rain, snow, condensation, etc.) trapped between layers of material may cause water stains or white rust, which can affect the service life of the material and will detract from its appearance.
2. If outdoor storage cannot be avoided, protect the panels with a ventilated canvas or waterproof paper cover. Do not use plastic, which can cause condensation. Keep the material off the ground in an inclined position with an insulator such as wood, or keep panels crated. Protective film may degrade or become brittle with exposure to direct sunlight.

PRECAUTIONS:

1. Oil canning is not a cause for rejection.
2. Exercise caution when lifting, moving, transporting, storing or handling Firestone metal to avoid possible physical damage.
3. Immediately remove protective film after installation.

This sheet is meant only to highlight Firestone's products and specifications. Information subject to change without notice. Firestone takes responsibility for furnishing quality materials, which meet Firestone's published product specification. As neither Firestone itself nor its representatives practice architecture, Firestone offers no opinion on, and expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure, or its ability to support a planned installation properly, the Owner should obtain opinions of competent structural engineers before proceeding. Firestone accepts no liability for any structural failure or for resultant damages, and no Firestone representative is authorized to vary the disclaimer.

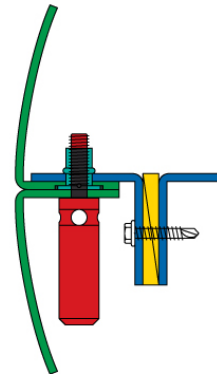

PRODUCT DATA

Panel Type:	Column Cover (with Hairline Vertical Joint)
Material Options:	.080, .090, .125, .190 aluminum 3-mm, 4-mm, 6-mm composite natural metals
Color:	Choose from 31 FSMP standard colors or custom color
Finish:	Kynar 500®/Hylar 5000® high performance fluorocarbon resinous coatings
Optional Finish:	Anodized Natural Metals
Sealant:	May be incorporated at horizontal or vertical joint configuration
Clip:	N/A
Substrate:	Angle Attachment
Standard Panel Surface:	Smooth

PANEL SIZE

Maximum Column Length:	16'
Minimum Column Length:	6"
Minimum Column Diameter:	12"

Firestone Metal Products Company, LLC
 1001 Lund Blvd. Anoka, MN 55303
 Phone: 763-576-9595 • Fax: 763-576-9596
 Toll Free: 800-426-7737
<http://www.unaclad.com>